

2 1/2 and 3-INCH STAINLESS STEEL SELF-SEALING COUPLINGS



GENERAL INFORMATION

The Avery-Hardoll CCMY 8150-series stainless steel, self-sealing couplings are designed primarily for use in the petroleum, chemical and brewing industries where reliability and safety are of primary concern.

The positive action, bayonet-type locking mechanisms facilitate the coupling and uncoupling of pressurised hoses and pipelines, under no-flow conditions.

A coupling consists of a hose unit and a tank unit, each with its own dust cap. Design features of the couplings include PTFE coating of components to promote ease of operation, selectivity to prevent inadvertent mixing of products and a choice of seal material to suit particular applications.

OPERATION

HOSE UNIT

The hose unit consists of a cam-operated, self-sealing valve assembly, a female bayonet type connector and a threaded hose connector which is free to rotate in its housing. The bayonet connector and valve assembly are interlocked such that the valve can only be opened by fully engaging the hose unit on its matching tank unit.

TANK UNIT

The tank units include a male bayonet-type connector and are flanged or threaded to suit installation requirements. Each unit contains a 'fail-safe' spring-loaded valve seating on a tapered seat. The valve is controlled by the action of coupling and uncoupling the base unit.

- FAIL SAFE TANK UNIT
- HOSE UNIT WITH BUILT-IN SWIVEL
- 60 psi COUPLING PRESSURE
- 150 psi WORKING PRESSURE
- CONSTRUCTED FROM 316 STAINLESS STEEL
- CHOICE OF SEAL MATERIAL
- 21 SELECTIVITY OPTIONS

1 - HOSE UNIT 2.5 IN BSP CCMY 8253
 2 - HOSE UNIT 3 IN BSP CCMY 8254

Material 316 Stainless Steel
 Weight 4.8 kg
 Max. Working Pressure 150 psi
 Max. Coupling Pressure 60 psi

TANK UNIT THREADED VERSION
 3 - 2.5 IN BSP CCMY 8251
 4 - 3 IN BSP CCMY 8252

Material 316 Stainless Steel
 Weight 3 kg
 Max. Working Pressure 300 psi
 Max. Coupling Pressure 60 psi

5 - TANK UNIT 2.5 IN FLANGED VERSION CCMY 8250

Material 316 Stainless Steel
 Weight 4 kg
 Max. Working Pressure 300 psi
 Max. Coupling Pressure 60 psi

Flanged tank units can be drilled to customers requirements on request.





6 - DUST COVER CCMY 1271

Material Stainless Steel
 Seals
 Hose and Tank units are available with a choice of seals:

Seal Material	Pt. No. Suffix
Viton	V
Nitrile	N
Chemraz	C
E.P.	E

PRESSURE DROP


PRODUCT: Distillate Specific gravity at 15 deg / 15 deg C = 0.80
 Viscosity at 15 deg C = 2.4 centistokes

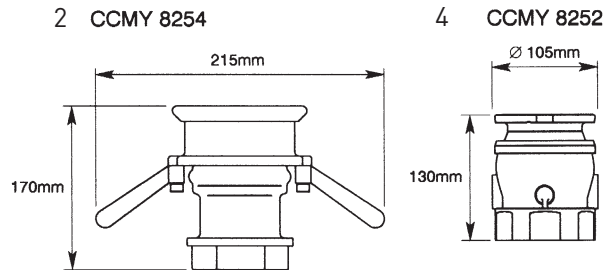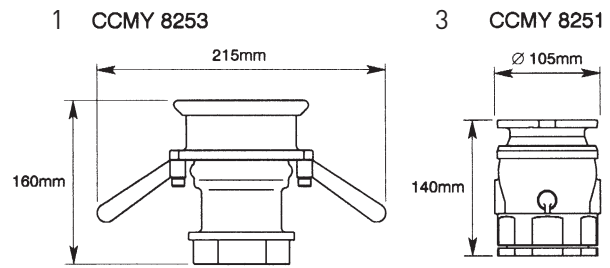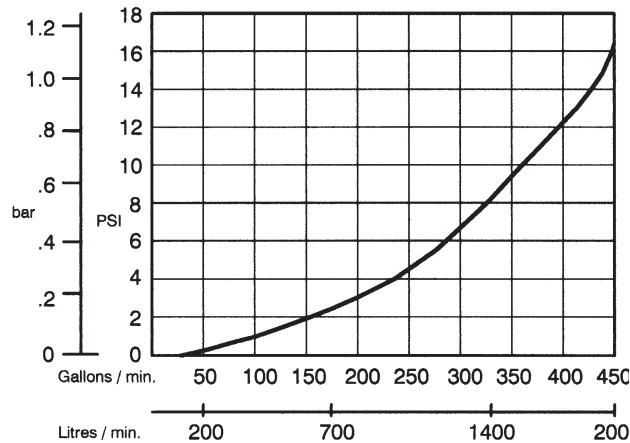

SELECTIVITY

To avoid product contamination caused by connecting a hose unit to the wrong tank unit, selective versions of the hose and tank units are available.

Selective Position Letter	A	B	C	D	E	F	G
Pin & Slot Position	1&2	1&3	1&4	1&5	1&6	1&7	2&3
Selective Position Letter	H	J	K	L	M	N	P
Pin & Slot Position	2&4	2&5	2&6	2&7	3&4	3&5	3&6
Selective Position Letter	Q	R	S	T	U	V	W
Pin & Slot Position	3&7	4&5	4&6	4&7	5&6	5&7	6&7

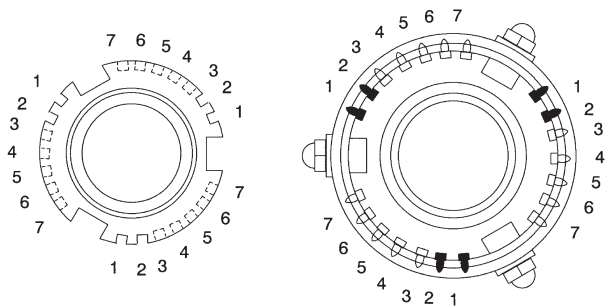

Intrico Products Ltd
 Unit 1, Harrison's Farm Estate
 Inglewhite Road
 Goosnargh
 Preston
 PR3 2ED
 Tel : 01772 785295
 Fax : 01772 783784
sales@intricoproducts.com

