


# D3C

single  
mechanical  
seal

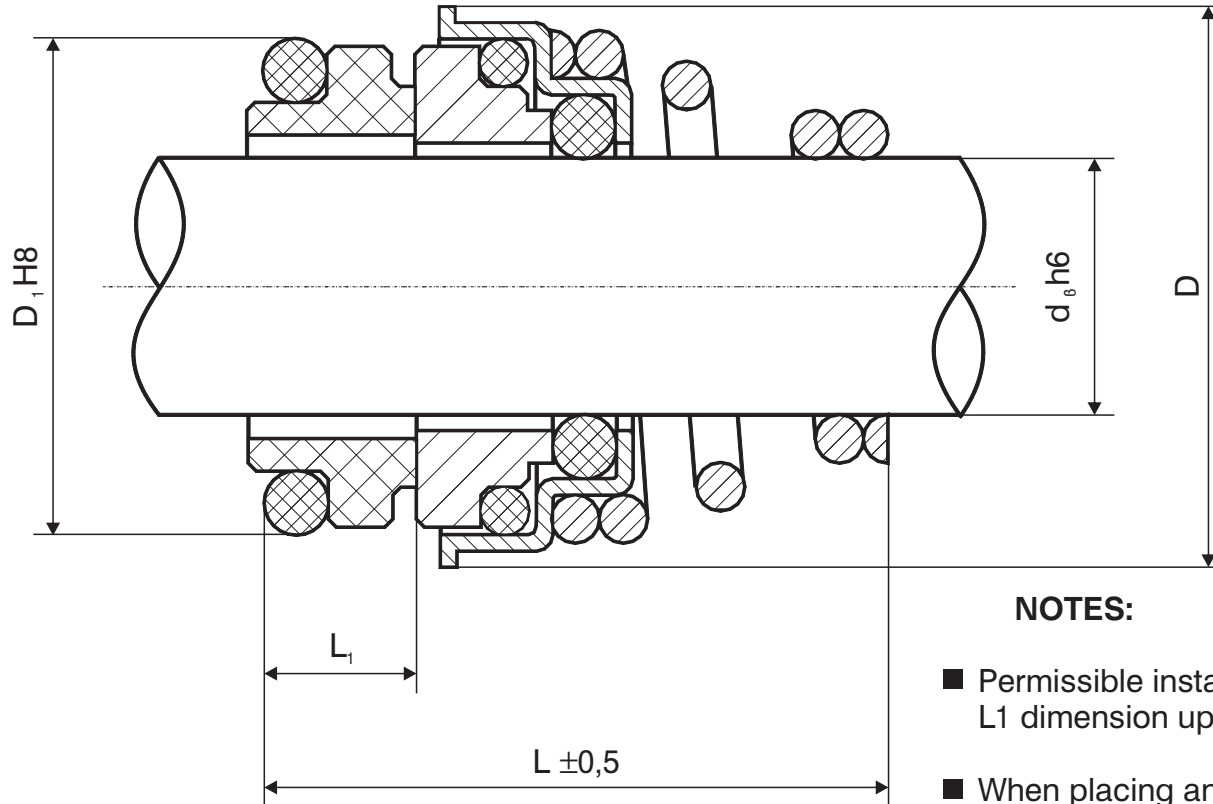


## NOTES:

- Permissible installing deviations of the L1 dimension up to +/- 1 mm.
- When placing an order specify the shaft rotation direction.  
( From the counterface point of view the shaft rotates to the right, if it moves clockwise).

## BASIC DIMENSIONS /mm/

d <sub>6</sub>	D1	D	L	L1
10	18,1	20	20,8	5,5
11	20,6	22	23,8	5,5
12	20,6	22	23,8	5,5
13	23,1	25	28,3	6,0
14	23,1	25	28,3	6,0
15	26,9	29	29,3	7,0
16	26,9	29	30,3	7,0
17	26,9	29	30,3	7,0
18	30,9	33	32,3	8,0
19	30,9	33	33,3	8,0
20	30,9	33	33,3	8,0
21	35,4	38	33,3	8,0
22	35,4	38	33,3	8,0
23	35,4	38	35,3	8,0
24	35,4	38	35,3	8,0
25	38,2	40	35,8	8,5
28	43,3	46	38,3	9,0
29	43,3	46	39,3	9,0
30	43,3	46	39,3	9,0
32	43,3	46	39,3	9,0
33	53,5	48	50,8	11,5
35	53,5	50	50,8	11,5
38	60,5	56	50,8	11,5
40	60,5	58	50,8	11,5

# D3C

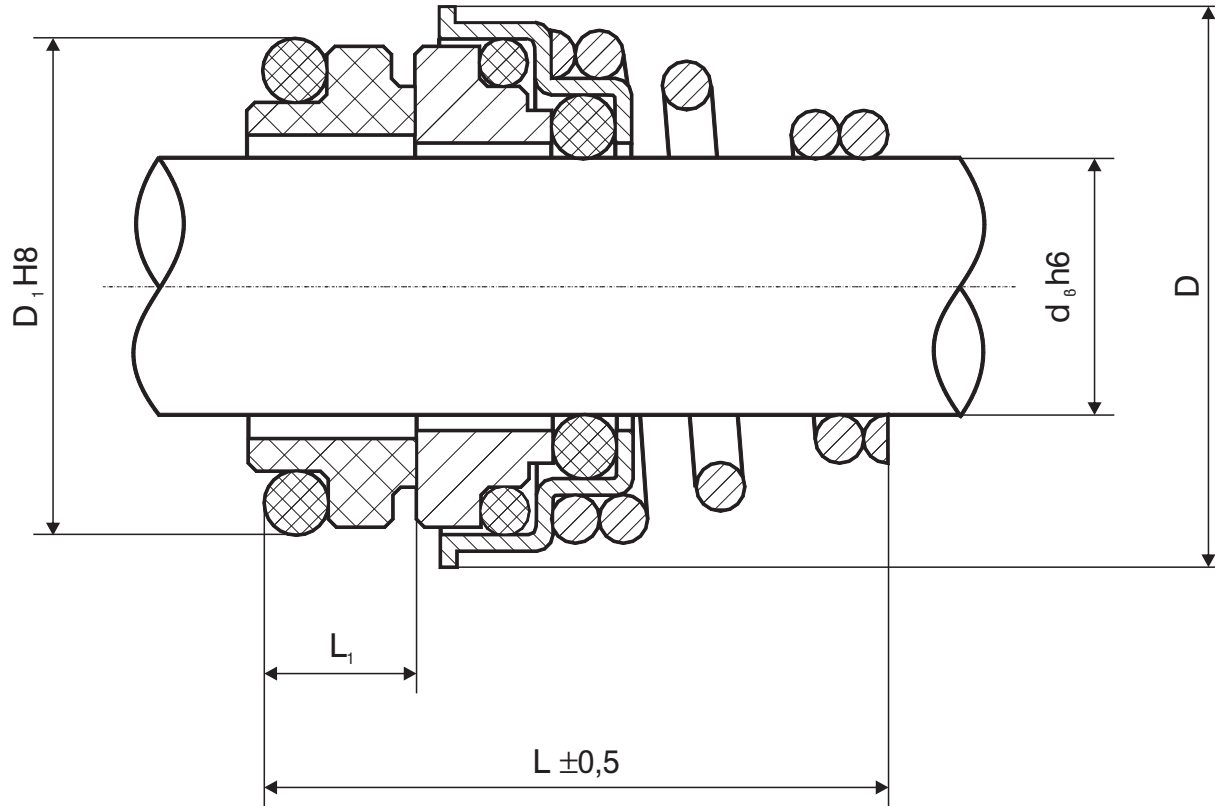

$d_b$	D1	D	L	L1
10	18,1	20	20,8	5,5
11	20,6	22	23,8	5,5
12	20,6	22	23,8	5,5
13	23,1	25	28,3	6,0
14	23,1	25	28,3	6,0
15	26,9	29	29,3	7,0
16	26,9	29	30,3	7,0
17	26,9	29	30,3	7,0
18	30,9	33	32,3	8,0
19	30,9	33	33,3	8,0
20	30,9	33	33,3	8,0
21	35,4	38	33,3	8,0
22	35,4	38	33,3	8,0
23	35,4	38	35,3	8,0
24	35,4	38	35,3	8,0
25	38,2	40	35,8	8,5
28	43,3	46	38,3	9,0
29	43,3	46	39,3	9,0
30	43,3	46	39,3	9,0
32	43,3	46	39,3	9,0
33	53,5	48	50,8	11,5
35	53,5	50	50,8	11,5
38	60,5	56	50,8	11,5
40	60,5	58	50,8	11,5